

A[®] SERIES

ON STREET DISPLAY SOLUTIONS...

32" SUPERSLIM OUTDOOR DISPLAY

SUN LIGHT READABLE
BRIGHTNESS 3000NITS
IK10 GLASS
FANLESS
WATERPROOF, SEALED IP67
SUPERSLIM 90mm DEPTH


SCREEN* SIZES AVAILABLE:
32", 43", 49" 55" 65" 75" 86"



* SINGLE AND DOUBLE SIDED OPTIONS AVAILABLE



KEY FEATURES:



Anti reflection,
IK10 anti vandal front glass




Waterproof, Sealed IP67
display module



Fanless
Maintenance Free



High operating temperature
as using 110 c LCD.

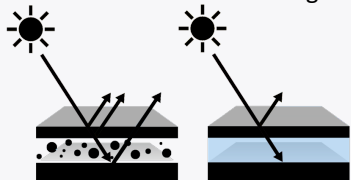

Without OB With OB

Optical Bonded display
increases efficiency / reduces reflection



Automatic configuration
and status reporting



High Brightness - 3000 nits
IK10 Glass
Sun light readable
+ Auto Brightness



Optional touch





+44(0) 20 3475 1540

UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

OPTICAL BONDING PROCESSED & ANTI-REFLECTION

Optical bonding is a process where a layer of resin is applied between the glass or touchscreen and TFT LCD TFT panel of a monitor, bonding them to make a solid laminate with no gaps or pockets of air. When choosing a screen for any project, you should evaluate the environment and operating conditions the screen will have to endure. AD Series Industrial grade screens offer optical bonding as standard.

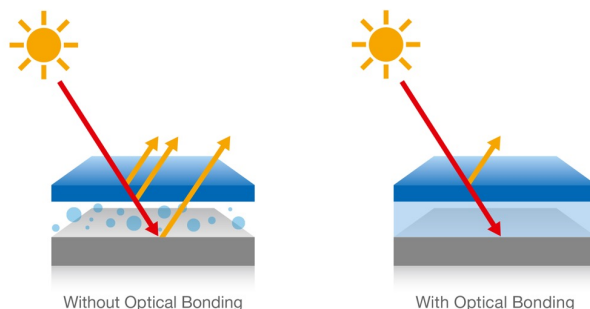


SUNLIGHT READABLE

Sunlight Readable LCD monitors are optically Bonded Daylight Readable Monitors that perform optimally when viewed and used in direct sunlight. AD Series outdoor display LCD monitors are ideal for use in bright conditions with indirect or reflected bright light

AUTO BRIGHTNESS CONTROL

The built in auto brightness control automatically reduces the LCD panels brightness depending on light levels & daylight operations. Saving on operating expenses and power consumption. The AD Series auto brightness control is essential for many on-street outdoor environments.

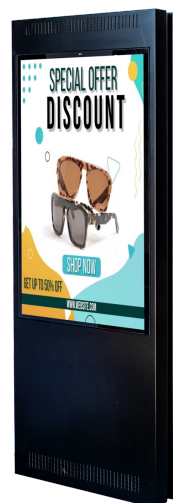

AD SERIES


Specifications

DIVERSIFIED CUSTOMISATION

The diversified product offers the customer the choice for any installation – ceiling mounting, wall mounting, and floor standing.



32" 43" 49" 55" 65" 75" 86"

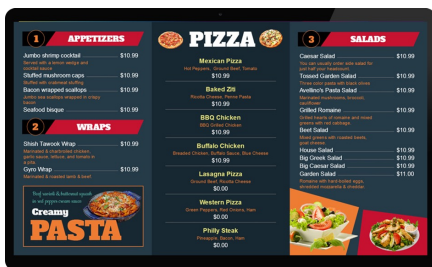

DEPARTURES				
TIME	DESTINATION	FLIGHT	GATE	REMARKS
12:39	LONDON	CL 903	31	CANCELLED
12:57	SYDNEY	UQ5723	27	CANCELLED
13:08	TORONTO	IC5984	22	CANCELLED
13:21	TOKYO	AM 608	41	DELAYED
13:37	HONG KONG	IC5471	29	CANCELLED
13:48	MADRID	EK3941	30	DELAYED
14:19	BERLIN	AM5021	28	CANCELLED
14:35	NEW YORK	ON 997	11	CANCELLED
14:54	PARIS	MG5870	23	DELAYED
15:10	ROME	RI5324	43	CANCELLED

KEY BENEFITS



Self Service



Commercial Use



Upselling Opportunities



Visitor Management



Greater Efficiencies



Access Control



+44(0) 20 3475 1540

UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

Display size	Wall mount single	Open Totem frame	Full Totem housing
Single display product code	AD320-ODFS2301-02	AD320-ODFS2301-02	AD320-ODTS2301-03
Double display product code	n/a	AD320-ODFD2301-02	AD320-ODTD2301-03

Product Specifications

Screen Size	32"
Resolution	1920*1080
Brightness	3000 NITS IK10 Glass
Display Area	698.4x392.85 mm (HxV)
Speaker	8w*2
OS	HDMI-In
Response Time	8ms
Waterproofing	IP67 waterproof heat sink cooling

Material Specification

Outdoor outer shell material	1. Main outer shell is made by Powder coated galvanized steel
	2. With a protection layer of laminated, low-iron, tempered glass to IK10 Optically bonded to the LCD Panel.
	3. Surface finishing: heavy industrial grade of powder coating with an anti-wear texture.
	4. Waterproof IP65 / IP67 , Vandalproof,Dustproof,Lightning protection, explosion-proof

Other Specification

Power supply	AC 110V - 240V, 50/60HZ
Indoor door Working Environment	Heat sink coolings system: -15 °/+110 °,
	Long life time low maintenance
Storage temperature	Heat sink system: -15 °/+110 °,
Video format	Support wmv, avi, flv, rm, rmvb, mpeg, ts, mp4,etc...
Image rotation	Support 0 degree, 90 degree, 180 degree, 270 degree manual/automatic rotation. Support gravity induction function (optional)
	(optional) automatic rotation. Support gravity induction function
Real time clock	Built-in real - time clock power battery, support time - switching machine
Audio and video output	Left and right channel output, built-in 8R/5W*2 amplifier
System upgrade	Support USB upgrade, network upgrade
Port	USB, VGA, RJ45 etc
Accessories	Remote control/Wifi antenna/ keys/screws

Outershell

- 1.IP67 level outershell is made by galvanized sheet.
- 2.With a protection layer of high-penetrating Tempered glass on the surface of the LCD Panel.
- 3.Surface finishing: heavy industrial grade of powder coating with an anti-wear texture for Outdoor using.
- 4.Water-proof, dust-proof double layer outershell,vandal proof.

*Specifications are typical and subject to change.



+44(0) 20 3475 1540

UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com