


Enhanced Passenger Display Solutions



RAIL DEPARTURES		
TIME	DESTINATION PLATFORM	STATUS
11:00	DESTINATION PLATFORM	DUE
11:15	DESTINATION PLATFORM	DELAYED
11:45	DESTINATION PLATFORM	ON TIME



21.2' Digital Passenger Display

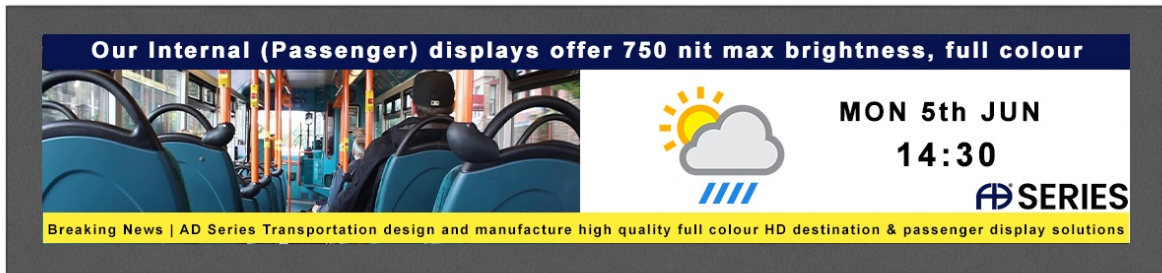


AD Series on board Enhanced Digital Display Screens are designed to deliver maximum value for Public Transport passengers, providers, operators and manufactures

- Specially designed for the public transport environment.
- providing an enhanced passenger experience.

Key Features

750 Nits


Brightness



Provided in framed and frameless configuration




24 Hour Commercial Use



+44(0)203 475 1540

UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

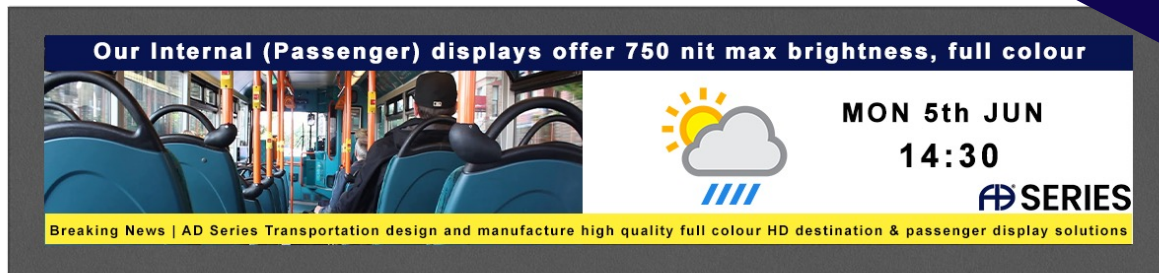

Overview

AD Series on board Enhanced Digital Display Screens are designed to deliver maximum value for Public Transport passengers, providers, operators and manufactures

- Specially designed for the public transport environment.
- providing an enhanced passenger experience.

Benefits

- High brightness for bright conditions
- Less than 1mm Pixel Pitch V x H
- 1920px as standard Resolution
- Flexible Mounting options
- Framed or embedded (frameless) configuration
- Clear high definition passenger information
- Full colour – can support video graphics
- Display a wide range of media from images to animations, videos audio and graphic displays
- Lightweight, can be easily accommodated.
- Fast to update, easy to read
- Additional advertising space

21.2' Digital Passenger Display


Key Features

750 Nits

Brightness



24 Hour
Commercial Use



Provided in framed
and frameless configuration



+44(0)203 475 1540






UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

Model #	BMES212-750MU-01
DIAGONAL Display SIZE (Inch's)	21.2
RESOLUTION (Pixel's)	1920 X 360
BRIGHTNESS (nits)	750
BRIGHTNESS (nits) options available - upgraded / downgraded on request	
PIXEL PITCH VxH (mm)	0.275 x 0.091
CONTRAST RATIO	1200:1
ASPECT RATIO	5:1
COLOURS	16.7M
RELIABILITY	50000 POH
VIEWING ANGLE (V/H)	178°/178°
INTERFACE Serial Link Monitor	Power, HDMI IN, Serial and USB on 500mm leads
VISIBLE AREA (mm)	535 x 107
Embedded WIDTH (mm)	551.1
Embedded HEIGHT (mm)	125.6
Embedded DEPTH (mm)	42
Embedded WEIGHT (KG Approx)	2
Framed WIDTH (mm)	560.7
Framed HEIGHT (mm)	130.5
Framed DEPTH (mm)	50
Framed WEIGHT (KG Approx)	2.5
OPERATING VOLTAGE	24-30 DVC
POWER CONSUMPTION (Approx)	23W
OPERATING TEMPERATURE	0 Deg. C - +40 Deg. C






21.2' Digital Passenger Display – Embedded

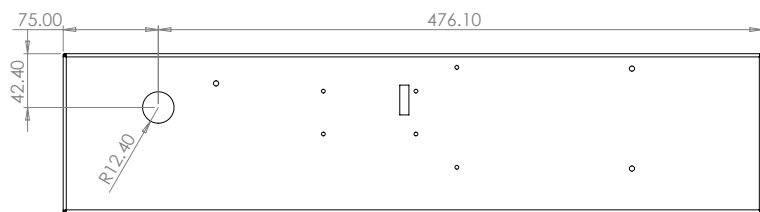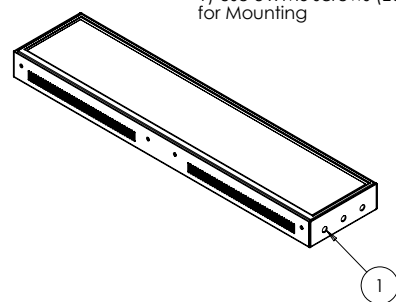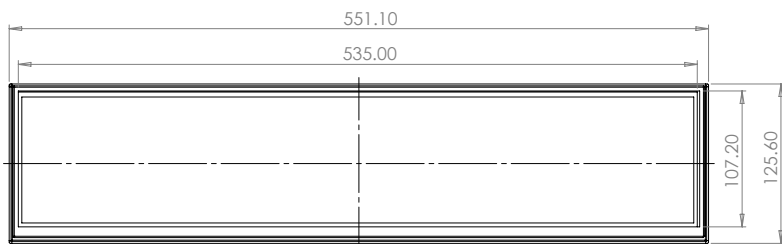

* Specification are subject to change.



21.2' Digital Passenger Display – Framed

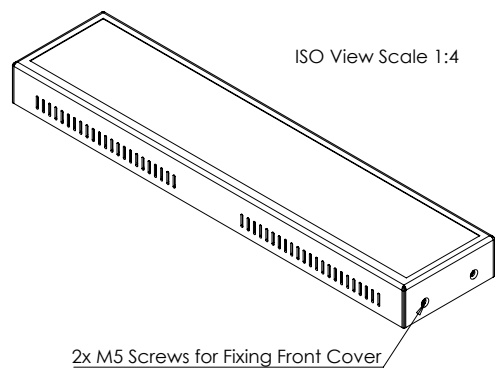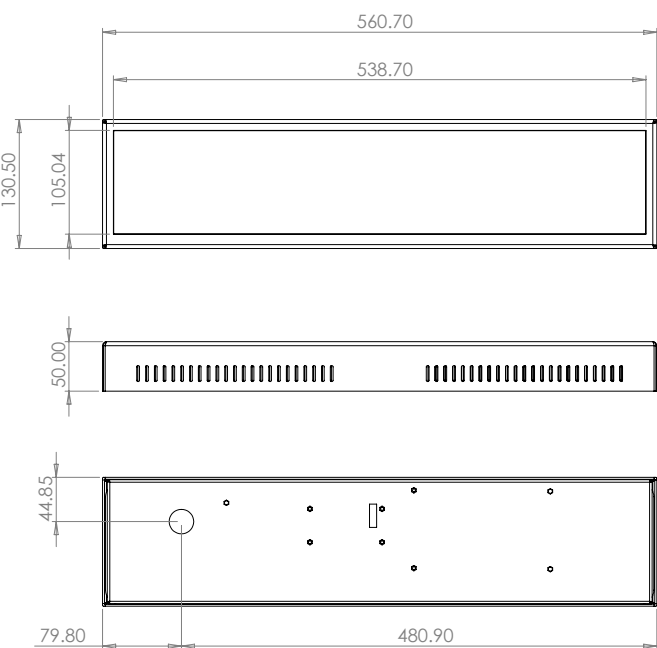

* Specification are subject to change.

