


AD SERIES

www.adseries.biz


Enhanced Destination
Display Solutions



RAIL DEPARTURES		
TIME	DESTINATION PLATFORM	STATUS
11:00	DESTINATION PLATFORM	DUE
11:15	DESTINATION PLATFORM	DELAYED
11:45	DESTINATION PLATFORM	ON TIME



58" Digital Destination Display - Front Blind

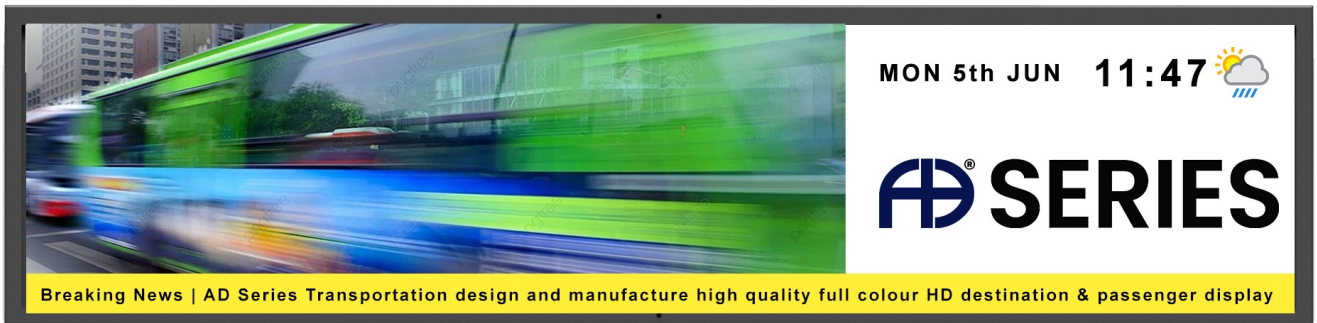

AD Series on board Enhanced Digital Display Screens are designed to deliver maximum value for Public Transport passengers, providers, operators and manufactures

- Specially designed for the public transport environment.
- Super High resolution providing an enhanced passenger experience.

Key Features

3000 Nits

Brightness



Clear Ultra High Definition
External Information




24 Hour
Commercial Use



+44(0)203 475 1540

UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

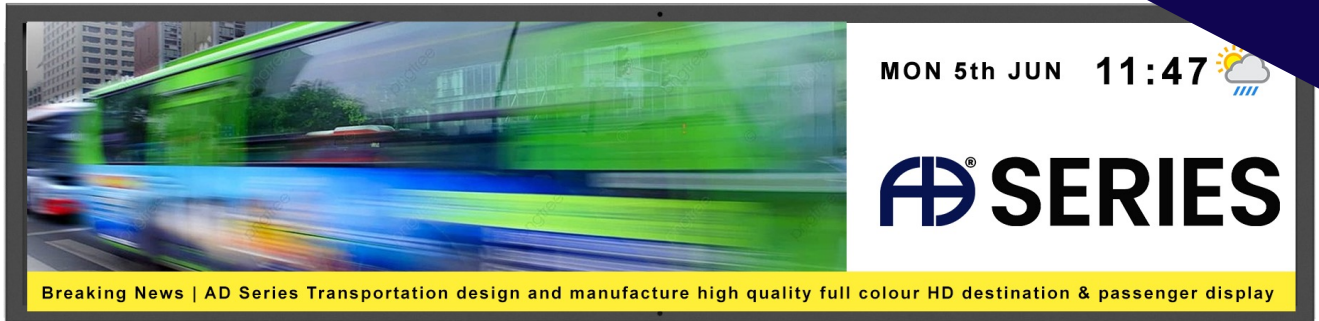

58" Digital Destination Display – Front Blind

Overview

AD Series on board Enhanced Digital Display Screens are designed to deliver maximum value for Public Transport passengers, providers, operators and manufactures

- Specially designed for the public transport environment.
- Super High resolution providing an enhanced passenger experience.

Benefits

- High brightness 3000 nits – read in direct Sunlight
- Less than 1mm Pixel Pitch V x H
- 1920px as standard Resolution
- Flexible Mounting options
- Intelligent Brightness, power and temperature management
- Clear high definition external information
- Full colour – can support video graphics
- Display a wide range of media format images to animations, videos audio and graphic displays
- Lightweight, adding minimal load
- Fast to update, easy to read
- Additional information space


Key Features

3000 Nits

Brightness



24 Hour
Commercial Use



Clear Ultra High Definition
External Information



+44(0)203 475 1540


UK Head Office: Unit 49 Eldon Way,
Paddock Wood, Kent, TN12 6BE

eva2@adseries.com

Model #	iBKE580-3KMU-01
DIAGONAL Display SIZE (Inch's)	58
RESOLUTION (Pixel's)	1920 X 441
BRIGHTNESS (nits)	3000-4000
BRIGHTNESS (nits) options available - upgraded / downgraded on request	
PIXEL PITCH VxH (mm)	0.744 x 0.744
CONTRAST RATIO	12000:1
ASPECT RATIO	16:3.5
RELIABILITY	50000 POH
VIEWING ANGLE (V/H)	178°/178°
COLOURS	16.7M
INTERFACE Serial Link Monitor	Power, HDMI IN, Serial and USB on 500mm leads
VISIBLE AREA (mm)	1456 x 323
WIDTH (mm)	1494.5
HEIGHT (mm)	365.76
DEPTH (mm)	82
DEPTH WITH FAN FILTERS (mm)	113.2
WEIGHT (KG Approx)	12.9
OPERATING VOLTAGE	24-30 DVC
POWER CONSUMPTION (Approx)	240W
OPERATING TEMPERATURE	0 Deg. C - +40 Deg. C



58" Digital Destination Display – Front Blind

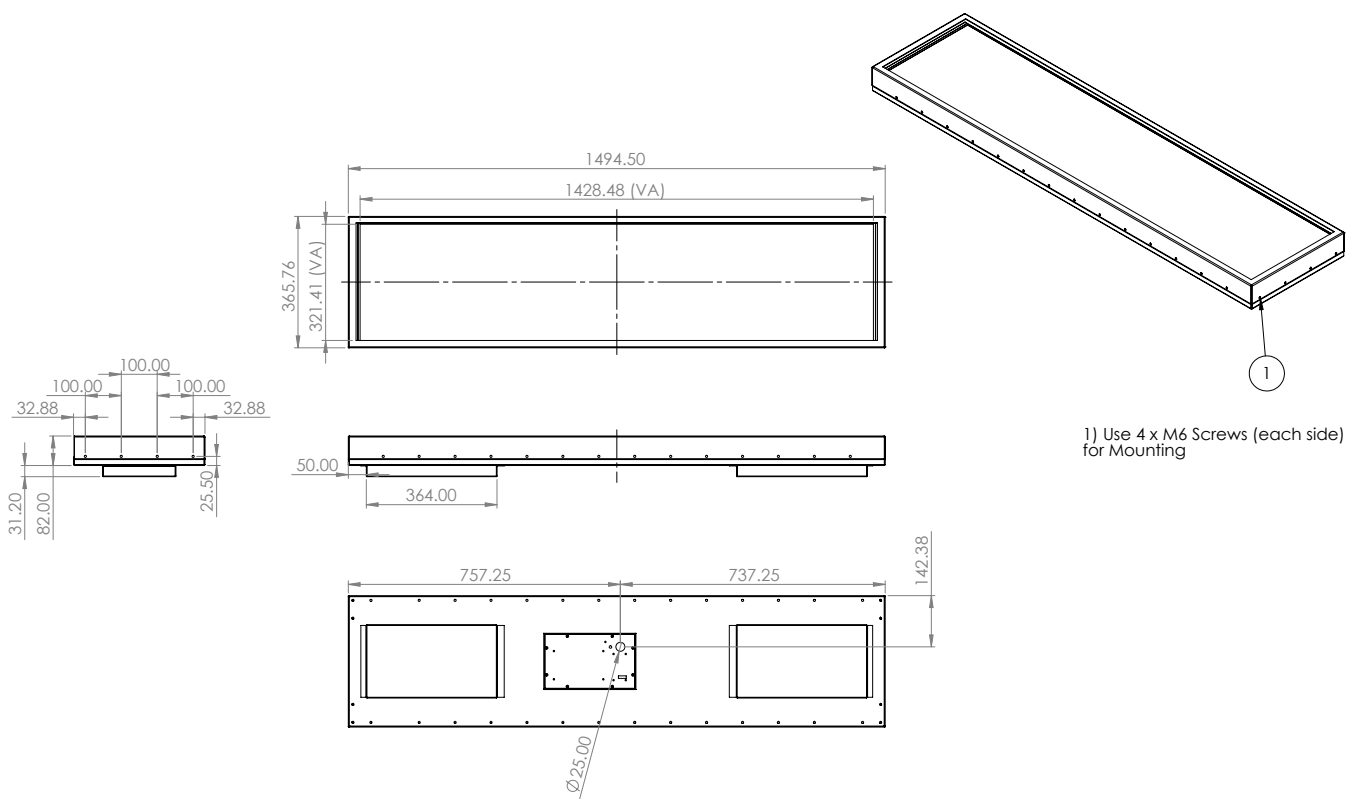

*External screens that Fan Filters are optional.

* Specification are subject to change.

